



STUDY OF SOLUTE SOLVENT INTERACTION THROUGH DIELECTRIC PROPERTIES OF ALLYL CHLORIDE WITH DIMETHYL FORMAMIDE USING TIME DOMAIN REFLECTOMETRY TECHNIQUE.

*G.M. DHARNE^B, A.P.MAHAROLKAR^B S. S. PATIL^B, P.W. KHIRADE^{*B} AND S. C. MEHROTRA^C*

^B Microwave Research Laboratory, Department of Physics, Dr. Babasaheb Ambedkar Marathwada University, Aurangabd-431 004 (M.S) India

^C Department of Computer Science and IT, Dr. B. A. M. University, Aurangabd-431 004 (India)

*Corresponding Author pwk004@yahoo.com

ABSTRACT

Dielectric relaxation measurements of Allyl Chloride (AC) with Dimethyl Formamide (DMF) mixture for different concentrations over the frequency range 10MHz to 20GHz at 288K, 298K, 308 k & 318K have been carried out using Picoseconds Time Domain Reflectometry (TDR). Static permittivity (ϵ_0), dielectric constant at high frequency (ϵ_∞) and relaxation time (τ) were found through dielectric measurements. The Bruggeman factor (f_B), Kirkwood correlation factor (g^{eff}), excess static permittivity (ϵ_0^E), and excess Inverse relaxation time ($1/\tau$)^E were determined and discussed to yield information on the molecular interaction and the Dynamics of the mixture of the system.

KEYWORDS

Dielectric relaxation; Time Domain Reflectometry; Bruggeman factor; Kirkwood and Correlation factor

INTRODUCTION

The Knowledge of frequency dependent dielectric properties of binary mixture is important both in fundamental studies of solvent structure determination and its dynamics as well as in the practical application of microwave heating process^{1,2}. At a fundamental level, the frequency-dependent

dielectric behavior of liquid mixture provides information on molecular process. The dielectric relaxation behavior of mixture of polar molecules under varying conditions of compositions is very important as it helps in obtaining information about relaxation process in mixtures. Thus several investigations on the dielectric behavior of solvent mixtures in which dielectric relaxation spectra were



STUDY OF SOLUTE SOLVENT INTERACTION THROUGH DIELECTRIC PROPERTIES OF ALLYL CHLORIDE WITH DIMETHYL FORMAMIDE USING TIME DOMAIN REFLECTOMETRY TECHNIQUE.

used to examine molecular orientations hydrogen bonded networks and micro dynamics of these systems³⁻⁹. This paper reports a systematic investigation of dielectric relaxation in binary mixture of Allyl Chloride with DMF at 288K, 298K, 308 k & 318K for different concentrations in the microwave region (10MHz to 20GHz) by using Time Domain Reflectometry (TDR).

2. EXPERIMENTAL

2.1 Chemicals

The chemical used in the present study is Allyl chloride, DMF of spectroscopic grade and used without further purification. The solutions were prepared at eleven different volume percentage of Allyl chloride 0% to 100% in steps of 10%.

Using these volume percents the mole fraction is calculated as¹³⁻¹⁴

$$X_1 = (V_A \rho_A / M_A) / [(V_A \rho_A / M_A) + (V_B \rho_B / M_B)] \quad (1)$$

Where M_A , V_A , ρ_A , M_B , V_B , ρ_B represents the molecular weight, volume percent and density of the liquid A and B respectively.

2.2 Apparatus

The complex permittivity spectra were studied using time domain reflectometry. The Hewlett-Packard HP 54750 sampling oscilloscope with HP 54754 a TDR plug-in module was used. A fast rising step voltage pulse of about 39 ps rise time generated by a pulse generator was propagated through a coaxial line system of characteristic impedance of 50 ohm. The

transmission line system under test was placed at the end of the coaxial line in the standard military application (SMA) coaxial cell, coaxial connector with 3.5 mm outer diameter and 1.35 mm effective pin length.

All measurements were done under open load conditions. The change in the pulse after reflection from the sample placed in the cell was monitored by the sampling oscilloscope. In this experiment, a time window of 5ns was used. The reflected pulse without sample $R_1(t)$ and with sample $R_x(t)$ were digitized in 1024 points in the memory of the oscilloscope and transferred to a PC through a 1.44 MB floppy diskette drive.

A temperature controller system with a water bath and thermostat has been used to maintain the constant temperature within the accuracy limit $\pm 1^\circ$ C. the sample cell was surrounded by a heat-insulating container through which the water of constant temperature using a temperature controller system was circulated. The temperature at the cell is checked using the electronic thermometer

2.3. DATA ANALYSIS

The time dependent data were processed to obtain complex reflection coefficient spectra $\rho^*(\omega)$ over a frequency range 10 MHz to 20 GHz by using Fourier transform^{15, 16} as

$$\rho^*(\omega) = \left[\frac{c}{j\omega d} \right] \left[\frac{p(\omega)}{q(\omega)} \right] \quad (1)$$

where $p(\omega)$ and $q(\omega)$ are Fourier transforms of $[R_1(t) - R_x(t)]$ and $[R_1(t) + R_x(t)]$ respectively, c is the velocity of light, ω is the angular frequency d is



STUDY OF SOLUTE SOLVENT INTERACTION THROUGH DIELECTRIC PROPERTIES OF ALLYL CHLORIDE WITH DIMETHYL FORMAMIDE USING TIME DOMAIN REFLECTOMETRY TECHNIQUE.

effective pin length and $j = \sqrt{-1}$, $R_1(t)$ is reflected pulse without sample and $R_x(t)$ is reflected pulse with sample. The complex permittivity spectra $\epsilon^*(\omega)$ were obtained from reflection coefficient spectra $\rho^*(\omega)$ by applying bilinear calibration method¹⁷. The static permittivity and relaxation time constant were obtained using the nonlinear least squares fit method¹⁸.

The general form of the relaxation model is given by the Havriliak-Negami equation¹⁹.

$$\epsilon^*(\omega) = \epsilon_\infty + \frac{\epsilon_s - \epsilon_\infty}{[1 + (j\omega\tau)^{(1-\alpha)}]^\beta} \quad (2)$$

Where ϵ_s is the static permittivity, ϵ_∞ is the permittivity at high frequency, τ is the relaxation time and α and β are empirical parameters for the distribution of relaxation times

3 Excess properties

3.1.1 Excess permittivity

For the detection of the cooperative domains in the mixture it is useful to compute the excess permittivity ϵ^E which may be further used to study dynamics of the mixture due to molecular interactions²⁰. The excess permittivity ϵ^E is defined as

$$\epsilon^E = (\epsilon_0)_m - [(\epsilon_0)_A X_A + (\epsilon_0)_B X_B] \quad (3)$$

Where X – mole fraction and suffices m , A , B represents mixture, liquid A and liquid B respectively. The excess permittivity provides qualitative information about (formation of

monomers and multimers in the mixture as follows) structural aspects of the mixture.

If $\epsilon^E = 0$: indicates the liquid A and B do not interact at all.

If $\epsilon^E < 0$: indicates the liquid A and B interaction in such a way that the total effective dipole gets reduced. This suggests that the liquid A and B may form multimers leading to less effective dipoles or in other words there is a tendency of dipole to align in antiparallel direction.

If $\epsilon^E > 0$: indicates the liquid A and B interaction in such a way that the total effective dipole moment increases. There is a tendency of dipole aligned in parallel direction.

3.1.2 Excess inverse relaxation time

The information related to dynamics of the solute-solvent interaction might be obtained by excess properties related to the relaxation time in the mixture. The excess inverse relaxation time is defined as

$$(1/\tau)^E = (1/\tau)_m - [(1/\tau)_A X_A + (1/\tau)_B X_B] \quad (4)$$

Where $(1/\tau)^E$ is the excess inverse relaxation time which represents the average broadening of dielectric spectra. The information regarding the dynamics of solute solvent interaction from this excess property is as follows:

$(1/\tau)^E = 0$: Indicates there is no change in the dynamics of liquid A and B .

$(1/\tau)^E < 0$: Indicates liquid A and B interaction produces a field such that the effective dipole rotates slowly.



STUDY OF SOLUTE SOLVENT INTERACTION THROUGH DIELECTRIC PROPERTIES OF ALLYL CHLORIDE WITH DIMETHYL FORMAMIDE USING TIME DOMAIN REFLECTOMETRY TECHNIQUE.

$(1/\tau)^E > 0$: Indicates liquid A and B interaction produces a field such that the effective dipoles rotate rapidly, i.e., the field will co-operate in the rotation of the dipoles

3.2 Kirkwood correlation Factor.

The structural information about the liquids from the dielectric relaxation parameters may be obtained using the Kirkwood correlation factor g_f ²⁰ this factor is also a parameter for obtaining information regarding orientation of electric dipoles in polar liquids. The g_f for pure liquid can be obtained from the following expression.

$$\frac{4\pi N \mu^2 \rho}{9 KTM} g = \frac{(\epsilon_0 - \epsilon_\infty)(2\epsilon_0 + \epsilon_\infty)}{\epsilon_0(\epsilon_\infty + 2)^2} \quad (5)$$

where ϵ_0 is static permittivity, ϵ_∞ is permittivity at high frequency, μ is dipole moment in gas phase, ρ is density at temperature T, M is molecular weight, K is Boltzman constant, N is Avogadro's number. A modified form of this equation has been used to study the orientation of electric dipoles in binary mixtures. For the mixtures of two polar liquids, say A and B, equation (6) is modified by assuming that g^{eff} has become the effective correlation factor in the mixture. The Kirkwood equation for the mixture can be expressed as follows²¹⁻²²

$$\frac{4\pi N}{9KT} \left(\frac{\mu_A^2 \rho_A}{M_A} X_A + \frac{\mu_B^2 \rho_B}{M_B} X_B \right) g^{eff} = \frac{(\epsilon_{sm} - \epsilon_{\infty m})(2\epsilon_{sm} + \epsilon_{\infty m})}{\epsilon_{sm}(\epsilon_{\infty m} + 2)^2} \quad (6)$$

where g^{eff} is the effective Kirkwood correlation factor for a binary mixture with X_A and X_B as volume fractions of liquids A and B, respectively, ϵ_0 is permittivity, ϵ_∞ is permittivity at high frequency, μ

is dipole moment in gas phase, ρ is density at temperature T, M is molecular weight, K is Boltzman constant, N is Avogadro's number..

3.3 Bruggeman factor

The modified Bruggeman equation²³ is another parameter, which is used to study intermolecular interactions between two (components of) liquids A and B respectively. The Bruggeman factor f_B is given by

$$f_B = \left(\frac{\epsilon_{0m} - \epsilon_{0B}}{\epsilon_{0A} - \epsilon_{0B}} \right) \left(\frac{\epsilon_{0A}}{\epsilon_{0m}} \right)^{1/3} = 1 - V \quad (7)$$

According to equation (7) a linear relationship is expected between Bruggeman factor and volume fraction of Allyl chloride. Any deviation from this linear relation indicates existence of intermolecular interactions.

Table 1

Dielectric Constant of AC+DMF

Mole fraction of DMF	288K	298K	308K	318K
1	42.32	39.44	37.03	35.03
0.9049	38.71	35.85	34.35	32.62
0.8088	35.91	33.8	31.73	30.45
0.7116	32.89	30.71	29.92	28.06
0.6134	29.68	28.17	26.65	24.91
0.5140	26.94	24.99	23.58	22.84
0.4135	24.4	22.16	21.16	20.18
0.3119	21.26	19.21	18.01	17.35
0.2091	17.68	16.27	14.6	14.01
0.1052	13.3	11.81	11.38	10.71
0	8.26	8	7.8	7.56



STUDY OF SOLUTE SOLVENT INTERACTION THROUGH DIELECTRIC PROPERTIES OF ALLYL CHLORIDE WITH DIMETHYL FORMAMIDE USING TIME DOMAIN REFLECTOMETRY TECHNIQUE.

Table 2

Relaxation Time of AC+DMF.

Mole fraction of DMF	288K	298K	308K	318K
1	18.64	16.85	14.46	12.98
0.9049	17.84	15.96	13.87	12.56
0.8088	17.04	15.26	13.48	12.26
0.7116	16.24	14.66	13.09	12.01
0.6134	15.43	13.97	12.59	11.66
0.5140	14.64	13.28	12.16	11.32
0.4135	13.85	12.58	11.62	10.96
0.3119	13.04	11.89	11.09	10.54
0.2091	12.24	11.18	10.54	10.14
0.1052	11.44	10.54	10.05	9.71
0	10.65	9.91	9.57	9.22

RESULT AND DISCUSSIONS:

The determined values of static dielectric constant (ϵ_0) and relaxation time (τ) for solution of different concentrations & different temperatures of AC-DMF are listed in Table 1, 2. It has been observed that the dielectric constant (ϵ_0) decreases as mole fraction of AC increases. The relaxation time, for the AC-DMF system decreases with increase in concentration of AC. In an ideal mixture of polar liquids, if the molecule is interacting, a nonlinear variation in dielectric constant and relaxation time with concentration is expected; fig 1, 2 shows the

similar results this confirms the intermolecular association is taking place in the system. The dielectric relaxation time shows continuous decrease with increase in temp offers maximum hindrance to rotation of the molecule.

Figure 1

Excess Permittivity of AC+DMF

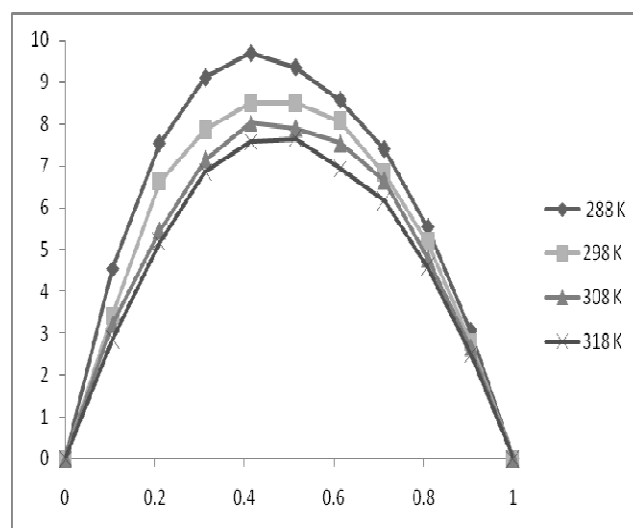


Fig 1 shows excess permittivity is negative indicates the liquid A and B interaction in such a way that the total effective dipole moment increases. There is a tendency of dipole aligned in parallel direction.

The excess property related to relaxation time provides significant information regarding interaction between the polar-polar liquid mixtures. The excess inverse relaxation (τ) of mixtures was calculated using eq. (4) and its variation with mole fraction of AC in DMF at 288K, 298K, 308 k & 318K is shown in fig2.

STUDY OF SOLUTE SOLVENT INTERACTION THROUGH DIELECTRIC PROPERTIES OF ALLYL CHLORIDE WITH DIMETHYL FORMAMIDE USING TIME DOMAIN REFLECTOMETRY TECHNIQUE.

Figure 2

Excess Inverse Relaxation Time of AC+DMF


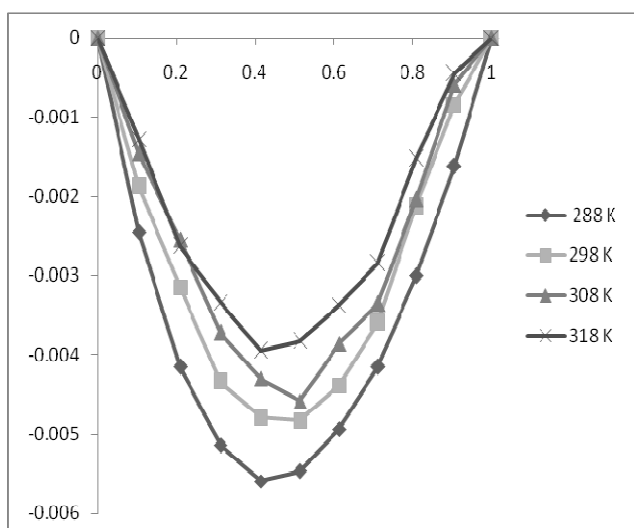


Figure 3

Bruggeman Factor of AC+DMF

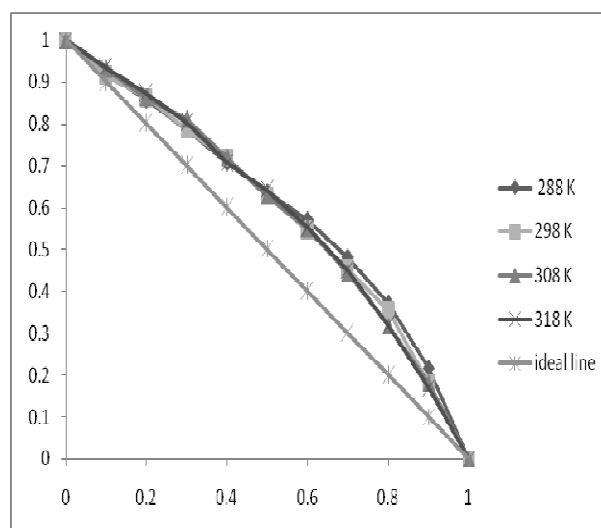

From the figure it is observed that $(1/t)^E$ is negative for entire range of concentration. The negative value of excess inverse relaxation time indicates the slower rotation of the dipoles of the system. According to Eq. (7) a linear relationship is expected between f_B and mole fraction. The estimated values of f_B are shown in fig.3.

This shows the nonlinear relation between f_B and mole fraction. The Bruggeman f_B shows a positive deviation throughout, from the ideal line. This indicates existence of intermolecular interaction in the mixture.


The Kirkwood correlation factor (g^{eff}) calculated using Eq. (6) is given in Fig 4.



STUDY OF SOLUTE SOLVENT INTERACTION THROUGH DIELECTRIC PROPERTIES OF ALLYL CHLORIDE WITH DIMETHYL FORMAMIDE USING TIME DOMAIN REFLECTOMETRY TECHNIQUE.

Figure 4

Kirkwood Correlation Factor of AC+DMF

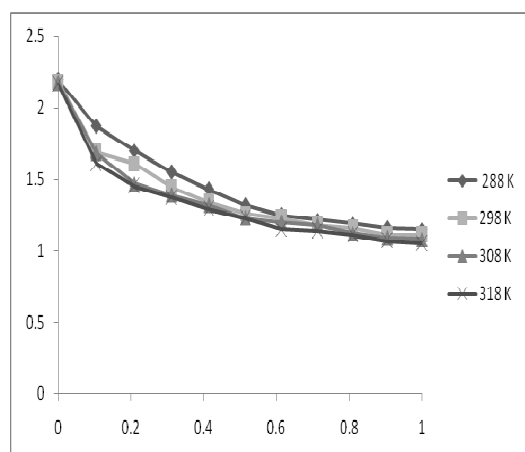

The values of g^{eff} are greater than one shows strong intermolecular interactions within the system.

CONCLUSION

Dielectric relaxation parameters and Kirkwood correlation factor have been measured for the Allyl Chloride with DMF mixtures for various concentrations & at 288K, 298K, 308 k & 318K. The dielectric constant increases, with an increase in the percent of AC molecules. These data provide information about the interaction of the molecules in the system.

REFERENCES

- 1 C. Gabriel, S. Gabriel, E. H. Grant, B.S.J. Halstead and D. M. P. Mingos, Chem. Soc. Rev 27, 213 (1998)
- 2 C Kuang and S. O. Nelson, J. Microw Pow. and Energy 32,114(1997)
- 3 R. H. Fattepur, M.T Hosamani, D.K. Deshpande and S.C. Mehrotra J. chem. Phys. 101, 9956 (1994)
- 4 A. C. Kumbharkhane, S. M. Puranik and S. C. Mehrotra. J. sol chem..22,219 (1993)
- 5 P. Firman, M. Marchetti, M. Eyrin, E.M. Xu and S. J. Petrucci, phys. Chem.95, 7055(1991)
- 6 S.P. Patil, A. S. Chaudhari, M. P. Lokhande, M.K. lande, A.G. Shankarwar, S.N. Helambe, B. R. Arbad and S.C. Mehrotra, J. Chem. Eng. Data 44,875 (1999)
- 7 J. Z. Bao, M .L. Swicord and C.C. Davies, J.chem. phys.104, 4441 (1996)
- 8 B.M. Suryavanshi and S.C. Mehrotra J. pure Appl. Phys. 29, 442 (1991)
- 9 A. Chaudhari, H. Chaudhari and S.C. Mehrotra j. chin. Chem.soc.49, 489 (2002)
- 10 R.M. Shirke, A. Chaudhari, N.M. More, and P.B. Patil J.sol chem.31,305 (2002)
- 11 B.G Lone, P. B. Undre, S. S. Patil, P.W. Khirade, S. C. Mehrotra J. of Mole.liqu.141,47-53 (2008)
- 12 P. P. Sivagurunathen, K Dharmalingam, K. Ramachandran, B. Prabhakar undre, P.W. Khirade and S. C. Mehroera. Mol.Phys.104,2835-2840 (2006)
- 13 K. Dharmalingam, K. Ramchandran, P. Shivgu runathan, B. Prabhaskar Undre, P. W. Khirade, S. C. Mehrotra .J. of Applied Polymer Science, vol 107, 2312-2316 (2008).



STUDY OF SOLUTE SOLVENT INTERACTION THROUGH DIELECTRIC PROPERTIES OF ALLYL CHLORIDE WITH DIMETHYL FORMAMIDE USING TIME DOMAIN REFLECTOMETRY TECHNIQUE.

- 14 P. Undre, S. N. Helambe, S. B. Jagdale, P. W. Khirade, S. C. Mehrotra. J of Mol Liquids 137(2008) 147-151.
- 15 H. A. Samulon, Proc. IRE 39 (1951) 175.
- 16 C. E. Shannon, Proc. IRE 37 (1949) 10.
- 17 R. H. Cole, J. G. Barbarian, S. Mashimo, G. Chryssikos, A. Burns E. Tombari J Applied Phys. 66 (1989) 793.
- 18 P. R. Bevinton, Data Reduction and Error Analysis for Physical Sciences (McGraw-Hill, New York, 1969).
- 19 S. Havriliak and S. Negami, J. Polym. Science C14, 99 (1966).
- 20 K. Dharmalingam, K. Ramchandran, P. Shivgurunathan, B. Prabhaskar Undre, P. W. Khirade, S. C. Mehrotra Bull. Korean Chem. Soc. 2006 27 12 2040-2044.
- 21 P. P. Sivagurunathen, K Dharmalingam, K. Ramachandran, B. Prabhakar undre, P. W. Khirade and S.C. Mehrotra J of Mol Liquids 133 (2007) 139-145.
- 22 P. P. Sivagurunathen, K Dharmalingam, K. Ramachandran, B. Prabhakar undre, P. W. Khirade and S.C. Mehrotra Physics B 387 (2007) 203-207.
- 23 P. Undre, S.N.Helambe, S. B. Jagdale, P. W. Khirade S. C. Mehrotra. Praman 68, 5 (2007) 851-861.